






# HOMAPAL® SRM SCRATCH RESISTANT MATT

## TECHNICAL DATA SHEET // METAL DECORS




















					
	<b>325 SRM Alu Brushed Champagne SRM</b>	<b>401/200 SRM Copper Crush SRM</b>	<b>401/229 SRM Copper Crush Stipple SRM</b>	<b>431 SRM Alu Crossbrushed Natural SRM</b>	<b>434 SRM Alu Crossbrushed Goldtone SRM</b>
<b>Sheet-Size</b> a: 2440 x 1220 mm b: 3050 x 1220 mm	a, b	a, b	a, b	a,b	a,b
<b>Net-Format</b>	-0,5 mm	-0,5 mm	-0,5 mm	-0,5 mm	-0,5 mm
<b>Thickness</b>	1,0	1,3	1,3	1,0	1,0
<b>Weight [kg/m²]</b>	1,5	2,1	2,1	1,5	1,5
<b>Surface</b> Material: Finish:	Aluminium UV-Laquer	Copper UV-Laquer	Copper UV-Laquer	Aluminium UV-Laquer	Aluminium UV-Laquer
<b>Balancing</b>	001 SRM or front decor	009 SRM or front decor	009 SRM or front decor	001 SRM or front decor	001 SRM or front decor
<b>Tolerances</b> Thickness: Length: Width: Flatness:	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m
<b>Postforming</b>	not possible	not possible	not possible	not possible	not possible
<b>Processing</b>	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²
<b>Max. Temperature</b> in use	80° C (short-term)	80° C (short-term)	80° C (short-term)	80° C (short-term)	80° C (short-term)
<b>Light fastness</b> (EN 438-2:2019, section 27)	Grey scale min. 4	no results so far	Grey scale min. 4	Grey scale min. 4	Grey scale min. 4
<b>Rollable</b>	not possible	not possible	not possible	not possible	not possible
<b>Resistance to staining</b> (EN 438-2:2019, section 26): Group 1 und 2: Group 3	5 4	5 4	5 4	5 4	5 4
<b>Resistance to scratching</b> (EN 438-2:2019, section 25):	Grade 3	Grade 3	Grade 3	Grade 3	Grade 3
<b>Resistance to surface wear</b> (EN 438-2:2019, section 10): Revolutions (min.) Initial abrasion point	>150	>150	>150	>150	>150

# HOMAPAL® SRM SCRATCH RESISTANT MATT

## TECHNICAL DATA SHEET // METAL DECORS








					
	<b>439 SRM</b> Alu Croshbrushed Brownish Grey SRM	<b>441 SRM</b> Alu Brushed Natural SRM	<b>442 SRM</b> Alu Brushed Goldtone SRM	<b>444N SRM</b> Alu Brushed Natural SRM	<b>446 SRM</b> Alu Brushed Steeltone SRM
	<b>Sheet-Size</b> a: 2440 x 1220 mm b: 3050 x 1220 mm				
	a, b	a, b	a, b	a,b	a,b
	<b>Net-Format</b>				
	-0,5 mm	-0,5 mm	-0,5 mm	-0,5 mm	-0,5 mm
	<b>Thickness</b>				
	1,0	1,0	1,0	1,0	1,0
	<b>Weight [kg/m²]</b>				
	1,5	1,4	1,4	1,5	1,4
	<b>Surface Material:</b>				
	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
	<b>Finish:</b>				
	UV-Laquer	UV-Laquer	UV-Laquer	UV-Laquer	UV-Laquer
	<b>Balancing</b>				
	001 SRM or front decor	001 SRM or front decor	001 SRM or front decor	001 SRM or front decor	001 SRM or front decor
	<b>Tolerances</b>				
	Thickness: ±0,15 mm	Thickness: ±0,15 mm	Thickness: ±0,15 mm	Thickness: ±0,15 mm	Thickness: ±0,15 mm
	Length: +100 mm/ -0 mm	Length: +100 mm/ -0 mm	Length: +100 mm/ -0 mm	Length: +100 mm/ -0 mm	Length: +100 mm/ -0 mm
	Width: +100 mm/ -0 mm	Width: +100 mm/ -0 mm	Width: +100 mm/ -0 mm	Width: +100 mm/ -0 mm	Width: +100 mm/ -0 mm
	Flatness: ≤ 100 mm/m	Flatness: ≤ 100 mm/m	Flatness: ≤ 100 mm/m	Flatness: ≤ 100 mm/m	Flatness: ≤ 100 mm/m
	<b>Postforming</b>				
	not possible	not possible	not possible	not possible	not possible
	<b>Processing</b>				
	at max. temperature of 60° C and max. pressure of 0,3 N/mm²	at max. temperature of 60° C and max. pressure of 0,3 N/mm²	at max. temperature of 60° C and max. pressure of 0,3 N/mm²	at max. temperature of 60° C and max. pressure of 0,3 N/mm²	at max. temperature of 60° C and max. pressure of 0,3 N/mm²
	<b>Max. Temperature in use</b>				
	80° C (short-term)	80° C (short-term)	80° C (short-term)	80° C (short-term)	80° C (short-term)
	<b>Light fastness (EN 438-2:2019, section 27)</b>				
	no results so far	Grey scale min. 4	Grey scale min. 4	Grey scale min. 4	Grey scale min. 4
	<b>Rollable</b>				
	not possible	not possible	not possible	not possible	not possible
<b>Resistance to staining (EN 438-2:2019, section 26):</b>					
Group 1 und 2:	5	5	5	5	5
Group 3	4	4	4	4	4
<b>Resistance to scratching (EN 438-2:2019, section 25):</b>					
	Grade 3	Grade 3	Grade 3	Grade 3	Grade 3
<b>Resistance to surface wear (EN 438-2:2019, section 10): Revolutions (min.) Initial abrasion point</b>					
	>150	>150	>150	>150	>150

# HOMAPAL® SRM SCRATCH RESISTANT MATT

## TECHNICAL DATA SHEET // METAL DECORS








					
	<b>447 SRM</b> Alu Brushed Coppertone SRM	<b>451 SRM</b> Alu Brushed Bronzeton SRM	<b>454 SRM</b> Alu Brushed Rosé Gold SRM	<b>455/000 SRM</b> Alu Brushed Graphite SRM	<b>456 SRM</b> Alu Brushed Medium Bronzeton SRM
<b>Sheet-Size</b> a: 2440 x 1220 mm b: 3050 x 1220 mm	a, b	a, b	a, b	a,b	a,b
<b>Net-Format</b>	-0,5 mm	-0,5 mm	-0,5 mm	-0,5 mm	-0,5 mm
<b>Thickness</b>	1,0	1,0	1,0	1,0	1,0
<b>Weight [kg/m²]</b>	1,4	1,4	1,4	1,4	1,4
<b>Surface</b> Material: Finish:	Aluminium UV lacquer	Aluminium UV lacquer	Aluminium UV lacquer	Aluminium UV lacquer	Aluminium UV lacquer
<b>Balancing</b>	001 SRM or frontdecor	001 SRM or frontdecor	001 SRM or frontdecor	001 SRM or frontdecor	001 SRM or frontdecor
<b>Tolerances</b> Thickness: Length: Width: Flatness:	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m
<b>Postforming</b>	not possible	not possible	not possible	not possible	not possible
<b>Processing</b>	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²
<b>Max. Temperature</b> in use	80° C (short-term)	80° C (short-term)	80° C (short-term)	80° C (short-term)	80° C (short-term)
<b>Light fastness</b> (EN 438-2:2019, section 27)	no results so far	Grey scale min. 4	Grey scale min. 4	Grey scale min. 4	no results so far
<b>Rollable</b>	no	no	no	no	no
<b>Resistance to staining</b> (EN 438-2:2019, section 26):  Group 1 und 2: Group 3	  5 4	  5 4	  5 4	  5 4	  5 4
<b>Resistance to scratching</b> (EN 438-2:2019, section 25):	Grade 3	Grade 3	Grade 3	Grade 3	Grad 3
<b>Resistance to surface wear</b> (EN 438-2:2019, section 10): Revolutions (min.) Initial abrasion point	>150	>150	>150	>150	>150

# HOMAPAL® SRM SCRATCH RESISTANT MATT


## TECHNICAL DATA SHEET // METAL DECORS


















					
	<b>490 SRM Copper Antique SRM</b>	<b>500/340 SRM Brass Diamond Antique' SRM</b>	<b>682 SRM Alu Satin Steeltone SRM</b>	<b>690/340 SRM Copper Diamond Antique SRM</b>	<b>695D SRM Copper Stratos Diagonal SRM</b>
<b>Sheet-Size</b> a: 2440 x 1220 mm b: 3050 x 1220 mm	a, b	a, b	a, b	a,b	a,b
<b>Net-Format</b>	-0,5 mm	-0,5 mm	-0,5 mm	-0,5 mm	-0,5 mm
<b>Thickness</b>	1,3	1,3	1,0	1,3	1,3
<b>Weight [kg/m²]</b>	2,1	2,0	1,7	2,0	2,1
<b>Surface Material: Finish:</b>	Copper UV-Laquer	Brass UV-Laquer	Aluminium UV-Laquer	Copper UV-Laquer	Copper UV-Laquer
<b>Balancing</b>	009 SRM or front decor	009 SRM or front decor	001 or front decor	009 SRM oor front decor	009 or front decor
<b>Tolerances</b> Thickness: Length: Width: Flatness:	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m
<b>Postforming</b>	not possible	not possible	not possible	not possible	not possible
<b>Processing</b>	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²
<b>Max. Temperature in use</b>	80° C (short-term)	80° C (short-term)	80° C (short-term)	80° C (short-term)	80° C (short-term)
<b>Light fastness (EN 438- 2:2019, section 27)</b>	Grey scale min. 4	Grey scale min. 4	Grey scale min. 4	Grey scale min. 4	Grey scale min. 3
<b>Rollable</b>	not possible	not possible	not possible	not possible	not possible
<b>Resistance to staining (EN 438-2:2019, section 26):</b>  Gruppe 1 und 2: Gruppe 3	5  4	5  4	5  4	5  4	5  4
<b>Resistance to scratching (EN 438-2:2019, section 25):</b>	Grade 3	Grade 3	Grade 3	Grade 3	Grade 3
<b>Resistance to surface wear (EN 438-2:2019, section 10): Revolutions (min.) Initial abrasion point</b>	>150	>150	>150	>150	>150

# HOMAPAL® SRM SCRATCH RESISTANT MATT

## TECHNICAL DATA SHEET // METAL DECORS



	800/200 SRM Alu Crush SRM	820/000 SRM Alu Softmatt Natural SRM
 <b>Sheet-Size</b> a: 2440 x 1220 mm b: 3050 x 1220 mm	a, b	a, b
 <b>Net-Format</b>	-0,5 mm	-0,5 mm
 <b>Thickness</b>	1,0	0,8
 <b>Weight</b> [kg/m²]	1,7	1,3
 <b>Surface</b> Material: Finish:	Aluminium UV-Laquer	Aluminium UV-Laquer
 <b>Balancing</b>	009 SRM or front decor	009 SRM or front decor
 <b>Tolerances</b> Thickness: Length: Width: Flatness:	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m
 <b>Postforming</b>	not possible	not possible
 <b>Processing</b>	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²	at max. temperature of 60° C and max. pres- sure of 0,3 N/mm²
 <b>Max. Temperature</b> in use	80° C (short-term)	80° C (short-term)
 <b>Light fastness</b> (EN 438- 2:2019, section 27)	Grey scale min. 4	Grey scale min. 4
 <b>Rollable</b>	not possible	not possible
 <b>Resistance to staining</b> (EN 438-2:2019, section 26):		
Group 1 und 2:	5	5
Group 3	4	4
 <b>Resistance to scratching</b> (EN 438-2:2019, section 25):		
	Grade 3	Grade 3
 <b>Resistance to surface wear</b> (EN 438-2:2019, section 10): Revolutions (min.) Initial abrasion point		
	>150	>150

<sup>1</sup> vertical joint at abt. 610 mm

### APPLICATION AREAS

Only use indoors, vertically and horizontally. The SRM Laquering provide properties to the surface according to EN 438-Teil-3:2016 (HGS) regarding to resistance to scratching (Test 25, Grade 3), Resistance to surface wear (Test 10, Grade 3, Initial abrasion point 150) und resistance to staining (Test 26).

# HOMAPAL® SRM SCRATCH RESISTANT MATT

## TECHNICAL DATA SHEET // METAL DECORS



### GENERAL INFORMATION

HOMAPAL® SRM is a decorative laminate with a surface material consisting of a thin metal layer. The metal layer is protected by a thin UV-laquer finish.

#### Note:

The craftpaper core layers are impregnated with phenol-formaldehyde resin. The HOMAPAL® metal laminate consists of approx. 55% paper, 25% phenol-formaldehyde resin and 20% metal foil.

The phenol-formaldehyde resin is irreversibly chemically cross-linked and forms a cured, stable material whose properties are fundamentally different to those of the raw materials.

HOMAPAL® SRM metal laminate is manufactured under the simultaneous application of heat (> 120°C) and a high specific pressure (> 5 MPa).



### CARE / CLEANING

A soft, lint-free cloth and a mild cleaning agent should always be used for cleaning. Strongly alkaline, strongly acidic, or cleaning agents with abrasive components must not be used. Alternative cleaning agents should only be used after consultation with HOMAPAL Application Technology.

### PROCESSING INFORMATION:

HOMAPAL® SRM metal laminate can be sawn, drilled or milled as with all standard laminates (HPL), whereby the use of hard-metal cutting tools is recommended. The standard safety directives regarding dust extraction and fire protection are to be complied with during the processing and finishing of HPL.

Due to the fact the the material has very sharp edges, gloves and safety goggles should be worn. Precautions should be taken to prevent dust during processing and local regulations must be com-

plied with. When processing, always observe the same working direction, otherwise there will be changes in the appearance.

When cutting, the decor side should always be facing up.

### SUBSTRATE:

All standard substrates suitable for laminates are also suitable for HOMAPAL® SRM metal laminate. It is to be ensured that the moisture content of the substrate is not higher than that of the HOMAPAL® SRM metal laminate (see Conditioning).



### GLUEING

Commercially available adhesives and glues such as PVAC glue, two-component adhesives (epoxy) and neoprene contact adhesives are recommended. Exception: Urea bonding adhesives are not suitable. Comply with the manufacturer processing instructions in all cases. Never use water-based adhesives when applying moisture-proof materials. The moisture in the adhesive cannot dissipate and, therefore, the adhesive bond cannot dry.



# HOMAPAL® SRM SCRATCH RESISTANT MATT

## TECHNICAL DATA SHEET // METAL DECORS



### STORAGE AND CONDITIONING



As with standard HPL products, HOMAPAL® SRM metal laminate must also be stored in a closed storeroom protected against moisture and UV radiation. Storage should be in a standard climate, i.e. approx. 18-25°C and 50-60% relative humidity.

The panel is covered with a protective foil upon completion of the final inspection. Our protective foil is only a transport protection. This does not absolve you from a timely incoming inspection (prior inspection of colour, colour uniformity and other quality characteristics of the laminate). The protective foil has to be removed before further processing. The surface protected by the removable protective foil should not be exposed to light for a long time. There is a risk that the foil will become more difficult to remove. (Use top cover!) The protective foil is not impermeable to liquids.

To avoid changes to the adhesive strength of the protective foil on the panel surface, the storage temperature should not deviate from the above specified temperatures by more than  $\pm 10^{\circ}\text{C}$  during longer storage periods.

Laminates are to be stored fully supported and horizontal. If this is not possible, positioning at an incline of approx.  $80^{\circ}$  with full-surface support and an abutment on the ground to prevent slipping is recommended. The best conditioning is achieved in the room climate of the later area of application. This conditioning is recommended because materials that are processed in an excessively moist condition will tend towards expansion over time, and materials that are too dry will tend towards shrinking. All materials should be conditioned together for at least 48 hours.

Note: Always carry panels flat to avoid bends and cracks in the surface.

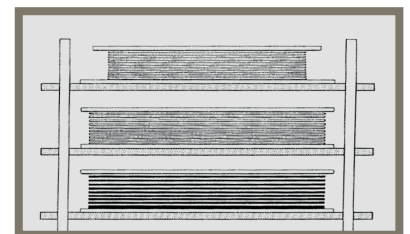

### BALANCING

Stresses always arise between two different materials that are joined together. Therefore, a substrate must be covered on both sides with materials that are subject to the same dimensional changes under the influence of heat and moisture (conditioning of all materials). This applies in particular if the finished composite panel is to be self-supporting and is not held by a rigid construction. The larger the areas to be covered, the more attention is to be paid to the choice of the backing type, a symmetrical construction and the density and rigidity of the substrate. Our experience shows that substrates of a thickness  $\leq 13$  mm are critical in terms of the flatness of the composite element.

Fundamentally, factors such as the rigidity and symmetrical construction of the substrate, uniform appliance of adhesive and press temperature, as well as the size and angle of attachment of the object have an over-proportional influence here. The best results are always achieved through the use of the same laminate from the same manufacturer on both the front and rear sides. Both sides must always be glued to the substrate with the same running or finish direction on both sides (never at right-angles to each other).

To keep costs low, the use of second-choice laminates of the same material, or special backing material without the finish quality of the top layer is recommended. The use of other materials as backing cannot be recommended - even if the physical characteristics are as close as possible to those of HOMAPAL® Metal laminate - because the results can never be predicted with certainty.

# HOMAPAL® SRM SCRATCH RESISTANT MATT

## TECHNICAL DATA SHEET // METAL DECORS



### FIRE AND EXPLOSION PROTECTION DATA

<b>IGNITION TEMPERATURE</b>	Approximately 400°C
<b>FLASH POINT</b>	None
<b>THERMAL DECOMPOSITION</b>	Possible above 250°C. Toxic gases (carbon monoxide, carbon dioxide) can be generated depending on the fire conditions (temperature, oxygen content, etc.).
<b>FLAMMABILITY</b>	HOMAPAL® SRM metal laminate classified as being of normal flammability.
<b>EXTINGUISHING AGENT</b>	HOMAPAL® SRM metal laminate has been assigned as Class A. Carbon dioxide, water jet or dry foam can be used to extinguish flames. Breathing apparatus and fire-protection clothing should be worn in the event of a fire.
<b>EXPLOSION HAZARD</b>	Processing, sawing, sanding, milling generates dust of class ST-1. Standard safety precautions and adequate ventilation are to be ensured.
<b>EXPLOSION LIMIT</b>	The dust concentration should be below 30 mg/m³.
<b>PROTECTION AGAINST FIRE AND EXPLOSION</b>	HOMAPAL® SRM metal laminate should be treated in the same way as wood material in the event of explosions or fire.
<b>STORAGE AND TRANSPORT</b>	HOMAPAL® SRM metal laminate is not classified as a hazardous substance for transport. There are no special requirements.
<b>HEALTH ASPECTS</b>	HOMAPAL® SRM metal laminate is not classified as being hazardous to people or animals. There is no evidence of toxic or eco-toxic effects. The finish is physiologically harmless.
<b>PENTACHLOROPHENOL</b>	HOMAPAL® SRM metal laminate does not contain PCP.
<b>MISCELLANEOUS</b>	HOMAPAL® SRM metal laminate is not a hazardous substance within the meaning of the regulation on hazardous substances.

### HOMAPAL LAMINATE IN THE EVENT OF FIRE

HOMAPAL® SRM metal laminate: As with any other material, in the event of incomplete combustion the smoke may contain toxic substances.

The same fire-fighting techniques can be used on fires involving HOMAPAL® SRM metal laminates that are used on wood-based building materials.

### ENVIRONMENTAL AND HEALTH ASPECTS

HOMAPAL® SRM metal laminate is a cured and therefore inert thermosetting plastic with a laquered, closed and hygienic metal foil. HOMAPAL® SRM metal laminate is a product and not a chemical substance, therefore the REACH Regulation does not apply.

These specifications are based on our current knowledge and experience. They do not, however, exempt the processor from undertaking his own tests and examinations. A legally binding assurance of the properties or suitability for a specific purpose can not be derived from our specifications. We recommend the use of our technical advice service in the event of doubt. It is the responsibility of the processor of our products to observe any trade mark rights as well as all existing laws and regulations.

Status: April 2020